

Magnetic Transducer

RoHS
Compliant

EMX- 12T01P

FEATURES: □

Rev.2




- Low Frequency
- Small Size and Compact
- Rich Sound


APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

DIMENSIONS: (Unit: mm)

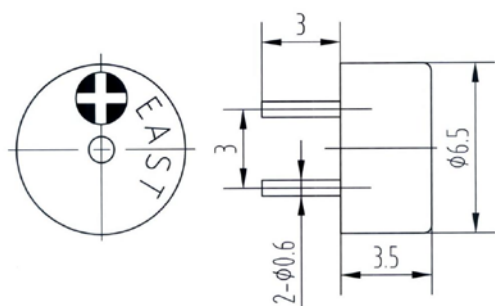


CHARACTERISTICS:

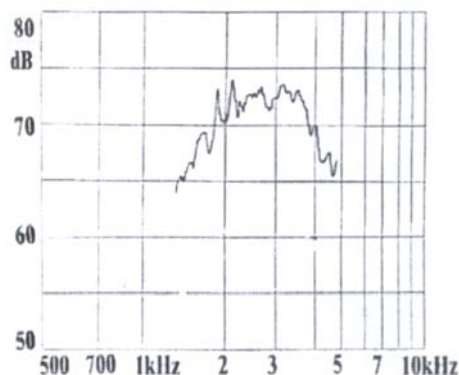

ELECTRICAL SPECIFICATIONS:

Min. Sound Pressure Level at	
1.5V/2731Hz/10cm.....	70dB(A)
Rated Voltage.....	1.5V
Operating Voltage.....	1~2V
Max. Consumption at	
2731Hz/3Vp-p Square Wave.....	80mA/1.5V _{DC}
Resonant Frequency.	2731Hz
Coil Resistance.	6.5±1Ω
Operating Temperature.....	-25~+70°C
Storage Temperature.....	-35~+85°C
Weight.....	1g

TEST CIRCUITS:

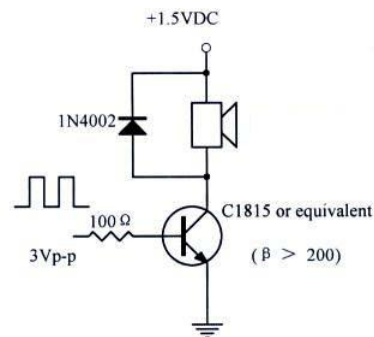

PACKING INFORMATION:

Packing: 3000 pcs per export carton

Carton Size: 47×25×28cm

G. Weight: 4.5 kgs N. Weight: 3.0 kgs

Address: No. 88 Jinhui East Road Yinzhou, Ningbo, 315104 P. R. China

Sales Tel: +86-574-87809820(International)/87805605(Domestic)

Fax: +86-574-87803761